


# GOAT LED 240W 4BARS

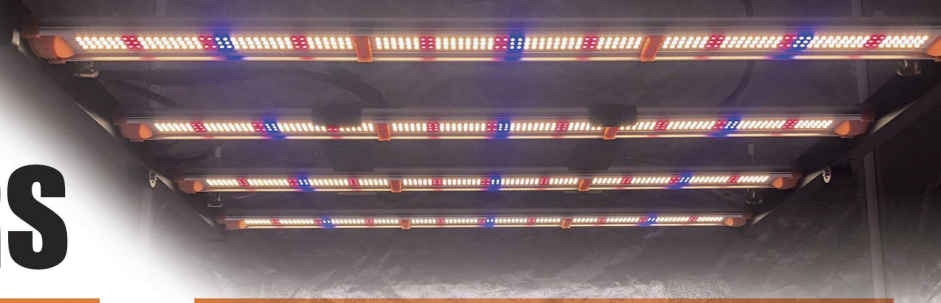

## SPECIFICATIONS

Light Source	LED
Spectrum	FullSpec&VegSpec
Light Output PPF	624 $\mu$ mol/s
Efficacy	2.6 $\mu$ mol/J@240V
AC Input Power	246W@120V,240W@240V
AC Input Voltage	100-277V
Light Distribution	120°
Mounting Height Above Canopy	12"-24" (30-60cm)
Thermal Management	Passive
Max. Ambient Temperature/Humidity	95F(35°C),90% RH
Dimming	0-10V Dimming
Total Harmonic Distortion (THD)	<10% at 100% Output
Lifetime (Driver and LED Q90)	>50000hrs
IP Rating per IEC60598-1	IP65
Certifications	CE RoHS,FCC
Warranty	3years

### NOMINAL ELECTRICAL AC INPUT\*

AC VOLTAGE	120V	240V	277V
AC Current	2.05A	1A	0.86A
AC Power	246W	240W	239W
Power Factor	0.99	0.97	0.96

\* At 77°F [25°C] ambient temperature and 100% output.

## ORDERING CODES




FAMILY	MODEL	SPECTRUM	INPUT VOLTAGE	DIMMER MODULE
MARS	Mars600	Full & Veg	100-277Vac	0-10V

AC CABLE LENGTH	AC PLUG TYPE	MOUNTING HARDWARE	PACKAGING
6ft(1.8M)	US	Steel Hanger	Outbox Box/1
	UK	Rope Hanger	
	EU		
	AU		

ALTERNATIVE AC/DC POWER CABLES- (Order separately)	Ordering Code
6 ft (1.8 m) AC Cable	RF-AC-180-US
10ft (3.0 m) AC Cable	RF-AC-300-US
6 ft (1.8m) DC Extension Cable	RF-DC-180-US
10ft (3.0m) DC Extension Cable	RF-DC-300-US

Customize Options	Ordering Code
Customize Spectrum/Driver /AC&DC Cord Length/Package	RF-CUS-Q100

## SPECTRA

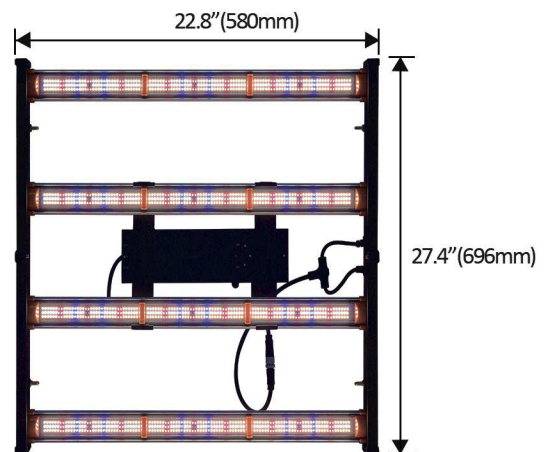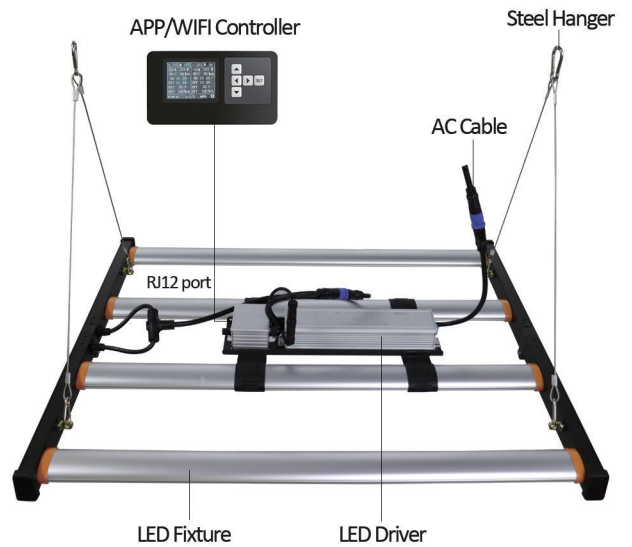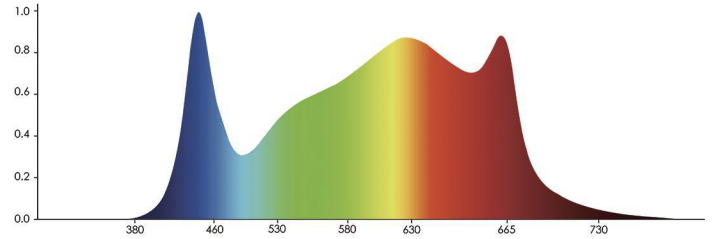

Package Dimension:630\*420\*140mm



### WARNING-POSSIBLE RISK OF INJURY TO EYES AND SKIN

Hazardous optical UV, HEV, and IR radiation may be emitted from the light source. Always wear personal protective equipment ensuring complete shielding of skin and eyes. Avoid prolonged exposure and looking directly at light source.